



PLAN VIEW

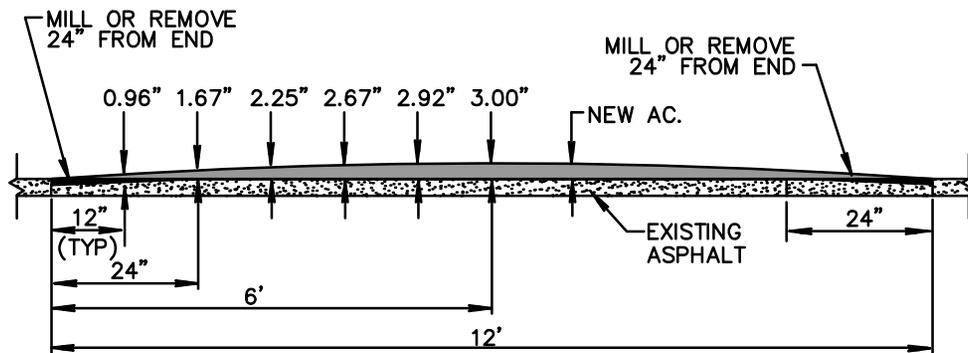

SECTION A-A

IMPORTANT:
TO GAIN MAXIMUM EFFECT, HUMPS MUST BE THE FULL 3". CONTRACTORS MUST NOT EXCEED THIS HEIGHT BASED ON CONSIDERATION FOR EMERGENCY POLICE AND FIRE DEPARTMENT VEHICLES.

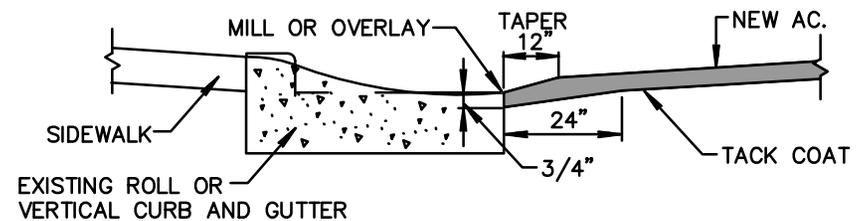

SECTION B-B

NOTES:

1. SPEED HUMPS SHALL NOT BE PLACED OVER MANHOLES, WATER VALVES, SURVEY MONUMENTS OR ANY SUBSURFACE INFRASTRUCTURE INDICATOR.
2. SPEED HUMPS SHALL NOT BE INSTALLED IN A LOCATION SUCH THAT ROADWAY DRAINAGE IS COMPROMISED.
3. SPEED HUMPS TO BE CONSTRUCTED WITH TYPE R-1.5 (D-1/2) COURSE, M.A.G. SPECIFICATIONS SECTION 710. A TACK COAT SHALL BE APPLIED PRIOR TO APPLICATION OF PAVEMENT MATERIAL.
4. CONTACT THE AGENCY ENGINEER ONE WEEK PRIOR TO INSTALLATION TO COORDINATE MARKINGS & SIGNING.